



# Milesight VMS Enterprise

Live View • Playback • Smart Analysis

OS: Windows 10/8/7,  
Windows Server 2019/2016/2012/2008



## INTRODUCTION

Milesight VMS Enterprise (ONVIF compliant) is a video management software designed for medium to large projects which can manage lots of network cameras in different locations and featured with Client/Server architecture. It maintains easy usability as well as great functionality. Live view, Playback, E-map, intelligent alarm, smart ANPR, all are there for free trial.



## DATASHEET

## KEY FEATURES


- ▶ Supports up to 2000 channels per system/128 channels per server/25 servers per system (The numbers given are recommended maximum.)
- ▶ Up to 4 monitors and 64 live view channels per monitor with main or sub streams optional
- ▶ Self-adaptive layout
- ▶ Up to 64 channels synchronous or asynchronous playback
- ▶ Quick locating & playback by tags, events
- ▶ Split playback (Split one video into multiple clips and play them back simultaneously.)
- ▶ Multiple kinds of overlays for exported videos
- ▶ Local and NAS storage
- ▶ Account management (Flexible customization of the privilege of the roles.)
- ▶ Friendly GUI for easy operation

Alarm can be triggered in real time by various events including VCA, multiple alarm actions can be enabled at the same time.

### VCA

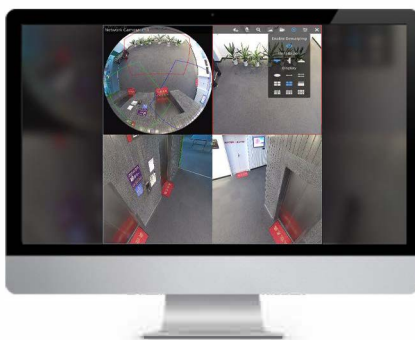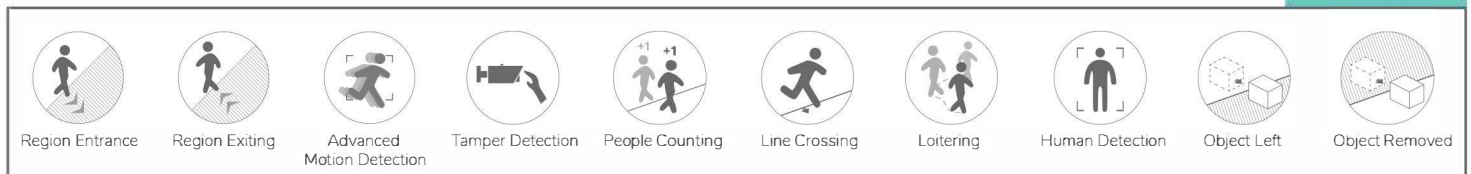


Support acaFisheye Dewarping in both live view and playback

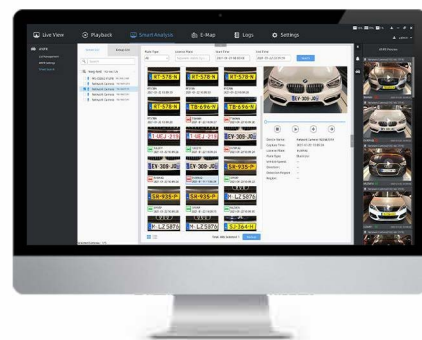


Support smart analysis like ANPR (black/white list detection and smart search)



<b>Software</b>	<b>Milesight VMS Enterprise</b>	
<b>Architecture</b>	Client/Server architecture	
<b>Client</b>		
<b>Hardware Requirement</b>	CPU: Intel Core i5 @2.9GHz or above Memory: 4GB or above HDD: HDD/SSD GPU: Recommend, discrete graphics card will be better Graphic Memory: 2GB or more Display Resolution: 1280 x 720 or above	
<b>OS</b>	Windows 7/8/10	
<b>Live View</b>	Simultaneously Playing	Up to 64-CH, self-adaptive layout
	Multi-monitor	Up to 4 Monitors
	Tour	Support
	Function	Snapshot, Record, Audio, Talk, Digital Zoom, Fisheye Dewarping, PTZ Control, Stream Switching, Instant Playback
<b>Device Management</b>	Channel	Support up to 2000 channels per system/128 channels per server (The numbers given are recommended maximum.)
	Protocol	MSSP/ONVIF/RTSP
<b>Video/Audio Compression</b>	Video Compression	H.265/H.264
	Audio Compression	G.711 U-Law/G.711 A-Law/AAC LC/G.722/G.726
	Video Resolution	12MP/9MP/8MP/6MP/5MP/4MP/3MP/1080P UXGA/720P/D1/VGA/CIF/QCIF
<b>Playback and Recording Management</b>	Playback Channel	Up to 64-CH synchronous or asynchronous playback
	Recording Type	Schedule/Event
	Playback Type	Schedule/Event/Tag
	Export Type	.mp4/.avi/.mkv/.asf/.gif/.exe (The .exe file has a built-in player.)
	Export Overlays	Text/Timestamp/Image/Privacy Mask/Transcoding
<b>Alarm</b>	Function	Snapshot, Audio, Digital Zoom, 1/32x~32x Slower/Faster Play Speed, Rewind Play, Fisheye Dewarping, Split Playback, Lock
	Alarm Type	External Alarm, Video Loss, Motion, Tampering, VCA Events, HDD Events, ANPR, Failover etc.
	Alarm Action	Emergency Recording, PTZ Movement, Email, Pop up Video, Play Sound etc.
<b>Server</b>		
<b>System Requirement</b>	CPU: Intel Core i3 @2.3GHz or above Memory: 8GB or above HDD: HDD/SSD NIC: 1GB or above	
<b>OS</b>	Windows 7/8/10, Windows Server 2008/2012/2016/2019	
<b>Online Users</b>	100	
<b>Servers</b>	Support up to 25 servers per system, 25 is a recommended maximum	
Performance is highly dependent on PC capacity, and the recommended configuration is just for reference.		

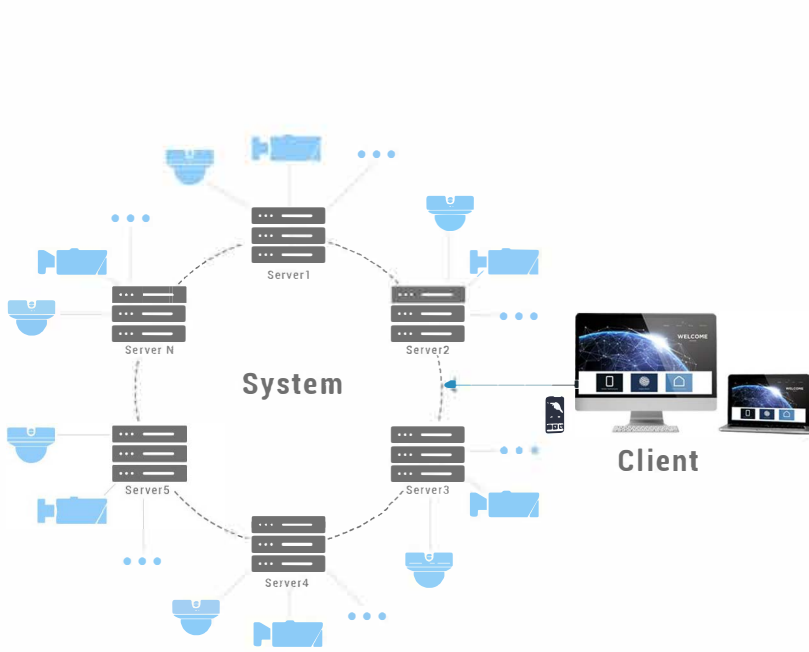

One system manages several servers. Every server shares the same data file.

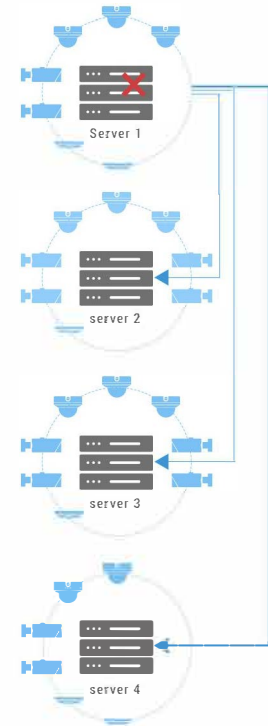

Taken over by multiple servers simultaneously. Cameras will be allocated to servers automatically to do load balancing.

Any functioning server with failover function on and valid licenses will take over the cameras of the failed server. The cameras with record on will keep recording.

Milesight Network Camera

Milesight VMS Enterprise

Third-party Network Camera

### Key Functions

Live View

E-Map

Playback

Logs

Smart Analysis

Settings